

# Ultra S mini

## HALF-CELL MONOFACIAL MODULE

TYPE: STPXXXS - B60/Wnh



POWER OUTPUT

**365-385W**

MAX EFFICIENCY

**21.1%**

### Features



#### High module conversion efficiency

Module efficiency up to **21.1%** achieved through advanced cell technology and manufacturing process



#### Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



#### Suntech current sorting process

Up to **2%** power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output



#### Extended wind and snow load tests

Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) \*



#### Excellent weak light performance


More power output in weak light condition, such as cloudy, morning and sunset



#### Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

### Industry-leading Warranty \*\*

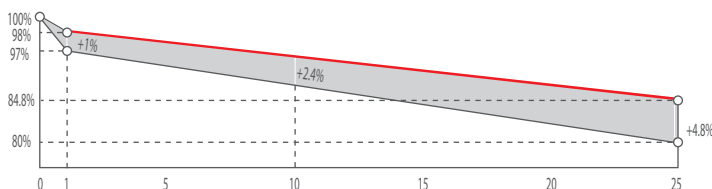

- ◆ First year power degradation: 2%
- ◆ Annual degradation: 0.55%
- ◆ Product warranty: 15 years
- ◆ linear warranty: 25 years

### Certifications and Standards

CE IEC 61730 IEC 61215  
 SA 8000 Social Responsibility Standards  
 ISO 9001 Quality Management System  
 ISO 14001 Environment Management System  
 ISO 45001 Occupational Health and Safety  
 IEC TS 62941 Guideline for module design qualification and type approval



Munich RE \*\*\*\*


\* Please refer to Suntech Standard Module Installation Manual for details.  
 \*\* Please refer to Suntech Limited Warranty for details.

\*\*\* WEEE only for EU market.  
 \*\*\*\* Suntech reserves the right to the final interpretation of the warranty by Munich RE.

# Ultra S STPXXXS - B60/Wnh 365-385W

## Mechanical Characteristics

Solar Cell	Monocrystalline silicon 166 mm
No. of Cells	120 (6 × 20)
Dimensions	1756 × 1039 × 35 mm (69.1 × 40.9 × 1.4 inches)
Weight	20.3 kgs (44.8 lbs.)
Front Glass	3.2 mm (0.126 inches) fully tempered glass
Output Cables	4.0 mm <sup>2</sup> , Landscape: (-) 1300 mm and (+) 1300 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1000 / 1500 V DC (IEC)
Connectors	1000V: MC4 , Cable01, STP-XC4 1500V: MC4 EVO2, Cable01S, STP-XC4
Maximum Series Fuse Rating	20 A
Power Tolerance	0/+5 W

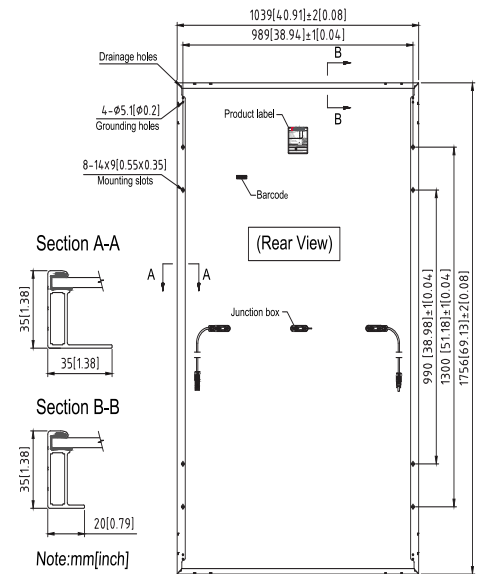

## Electrical Characteristics

Module Type	STP385S-B60/Wnh		STP380S-B60/Wnh		STP375S-B60/Wnh		STP370S-B60/Wnh		STP365S-B60/Wnh	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	385	290.9	380	286.3	375	281.9	370	278.2	365	274.3
Optimum Operating Voltage (Vmp/V)	34.9	32.4	34.7	32.2	34.5	32.2	34.3	32.0	34.1	31.8
Optimum Operating Current (Imp/A)	11.04	8.99	10.96	8.92	10.87	8.76	10.79	8.69	10.71	8.62
Open Circuit Voltage (Voc/V)	41.5	39.0	41.3	38.9	41.1	38.9	40.9	38.7	40.7	38.5
Short Circuit Current (Isc/A)	11.72	9.46	11.64	9.39	11.57	9.24	11.49	9.17	11.42	9.10
Module Efficiency (%)	21.1		20.8		20.6		20.3		20.0	

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5; NMOT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Tolerance of Pmax is within +/- 3%;

## Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.36%/°C
Temperature Coefficient of Voc	-0.304%/°C
Temperature Coefficient of Isc	0.050%/°C

## Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	31	31
Pallets per container	6	26
Pieces per container	186	806
Packaging box dimensions	1786×1130×1203 mm	
Packaging box weight	679 kg	

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

## Graphs

Current-Voltage & Power-Voltage Curve (385S)

